
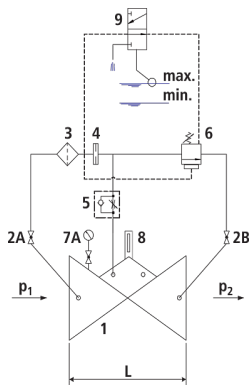


## Pressure retention valve DAV with float control

1406

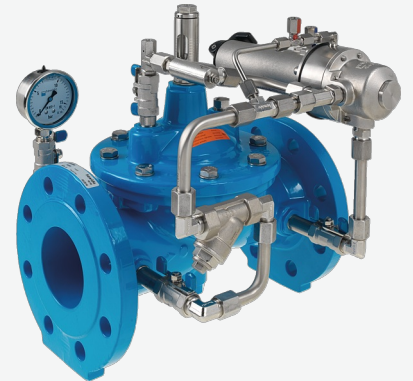

### Components

- 1: Main valve
- 2: Ball valve (A, B)
- 3: Filter
- 4: Orifice
- 5: Throttle check valve
- 6: Control valve
- 7: Pressure gauge with ball valve
- 8: Optical position indicator (optional: Electrical position indicator, opening limiter)
- 9: Float control valve

### Physical characteristics

- The main valve is a hydraulically operating diaphragm valve. The work energy is the inherent medium.
- Most valve types operate purely hydraulically without any foreign energy.

### Application

- To use in drinking water systems (other media after consultation)
- As an open/shut valve with hydraulic control for filling reservoirs, when the system must not fall below the level of the inlet pressure

### Mode of operation

- The pressure-sustaining valve with float control opens when the water level is low taking into account the set holding pressure. The closing procedure is slow in order to avoid shock pressure loads. Variable flow rate has no effect on the holding pressure which is regulated by the control valve. The overpressure or maintained pressure can be set within the range of 2 bar to 16 bar (standard design). The valve closes when the level of water in the reservoir has been reached.

### Product information

- To calculate the dimensions of the valve please refer to the following information:
- Maximum and minimum inlet pressure (static and dynamic pressure ratios)
- Desired maximum loss of pressure
- Maximum and minimum flow rates
- Available line diameters and lengths
- Construction of the valve (straight or angle design)
- For the calculation basis, information on the loss of pressure and the characteristic values of the valve, please refer to the end of Chapter E.

### Design

- Design according to DIN EN 1074
- Construction length acc. to DIN EN 558
- Flange mass according to DIN 1092-2, to PN 25 DN 300
- Pressure levels: PN 10 or PN 16 to DN 300, PN 25 to DN 200, higher pressures on request.
- Nominal widths DN 50, DN 80, DN 100 and DN 150 available in angular design
- Nominal widths 1 ½" and 2" with threaded connection (female thread)
- Medium temperature up to 40°C

### Installation and assembly

- Shut-off valves should be fitted on both sides of the valve and a dirt trap should be installed on the inlet side of the valve. Depending on the installation situation, a mounting/dismounting adapter should be provided. If there is a free run into the reservoir (without any counterflow from the reservoir) the outlet slider can be omitted.

### Vantages

- Maintenance-free, non-rusting valve seat
- Pressed-in seat
- EWS-coating according to RAL GSK

Article No.	DN	PN (bar)	L (mm)	weight (kg)	Availability
1406007000	1 1/2"	16	210	11.500	on demand
1406008000	2"	16	210	11.500	on demand
1406040000	40	16	200	16.250	on demand
1406050000	50	16	230	16.750	on demand
1406065000	65	16	290	21.800	on demand
1406080000	80	16	310	27.900	on demand
1406100000	100	16	350	35.900	on demand
1406125000	125	16	400	52.000	on demand
1406150000	150	16	480	76.000	on demand
1406200000	200	10	600	115.100	on demand
1406200016	200	16	600	115.100	on demand
1406250000	250	10/16	730	247.500	on demand
1406300000	300	10/16	850	362.000	on demand