
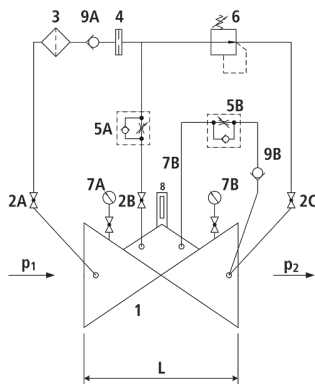


Pressure reducing valve with non-return function

1501

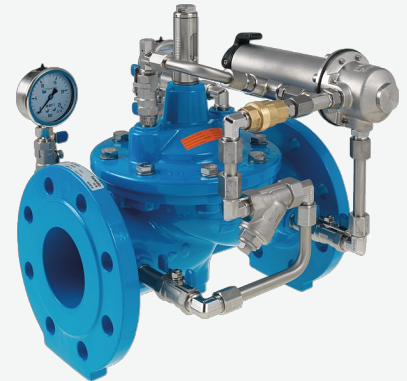

Components

- 1: Main valve
- 2: Ball valve (A, B, C)
- 3: Filter
- 4: Orifice
- 5: Throttle check valve (A, B)
- 6: Control valve
- 7: Manometer with ball valve (A, B)
- 8: Optical position indicator (optional: Electrical position indicator, opening limiter)
- 9: Check valve (A, B)

Physical characteristics

- The main valve is a hydraulically operating diaphragm valve. The work energy is the inherent medium.
- Most valve types operate purely hydraulically without any foreign energy.

Application

- To use in drinking water systems (other media after consultation)
- Reduction in pressure to supply the network
- Emergency feed into a second network (network connections) with backflow prevention

Mode of operation

- The pressure reducing valve reduces a variable inlet pressure to a constant outlet pressure. Fluctuating inlet pressure and flow rate have no effect on the outlet pressure controlled by the control valve. The outlet pressure is adjustable in the range from 1.5 to 12 bar (standard design). If the inlet pressure can fall below the outlet pressure, the backflow prevention function prevents any flowback of the water.

Product information

- To calculate the dimensions of the valve please refer to the following information:
- Maximum and minimum inlet pressure (static and dynamic pressure ratios)
- Maximum and minimum flow rates
- Possible requirement for extinguishing water
- Available line diameters and lengths
- Desired outlet pressure
- Construction of the valve (straight or angle design)
- For the calculation basis, information on the loss of pressure and the characteristic values of the valve, please refer to the end of Chapter E.

Design

- Design according to DIN EN 1074
- Construction length acc. to DIN EN 558
- Flange mass according to DIN 1092-2, to PN 25 DN 300
- Pressure levels: PN 10 or PN 16 to DN 300, PN 25 to DN 200, higher pressures on request.
- Nominal widths DN 50, DN 80, DN 100 and DN 150 available in angular design
- Nominal widths 1 ½" and 2" with threaded connection (female thread)
- Medium temperature up to 40°C

Installation and assembly

- Shut-off valves should be fitted on both sides of the valve and a dirt trap should be installed on the inlet side of the valve. Depending on the installation situation, a mounting/dismounting adapter and an aeration and ventilation system should be provided.

Vantages

- Maintenance-free, non-rusting valve seat
- Pressed-in seat
- EWS-coating according to RAL GSK

Article No.	DN	PN (bar)	L (mm)	weight (kg)	Availability
1501007000	1 1/2"	16	210	11.000	on demand
1501008000	2"	16	210	11.000	on demand
1501040000	40	16	200	15.750	on demand
1501050000	50	16	230	16.250	on demand
1501050025	50	25	230	16.250	on demand
1501065000	65	16	290	21.300	on demand
1501080000	80	16	310	27.400	on demand
1501080025	80	25	310	27.400	on demand
1501100000	100	16	350	35.400	on demand
1501100025	100	25	350	35.400	on demand
1501125000	125	16	400	51.500	on demand
1501150000	150	16	480	76.000	on demand
1501150025	150	25	480	77.000	on demand
1501200000	200	10	600	114.600	on demand
1501200016	200	16	600	114.600	on demand
1501250000	250	10/16	730	247.000	on demand
1501300000	300	10/16	850	356.000	on demand